


TYPE 1586

INTERFERENCE SUPPRESSION CHOKES

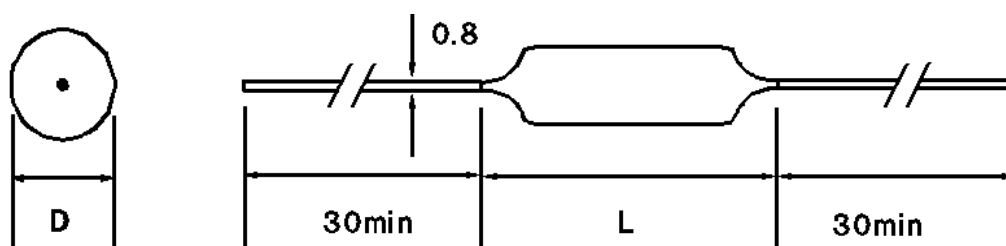

Dimensions in mm.

Core Ferrite..
 Coating Insulated with heat-shrink tube.
 Working Temperature -55 to +85 °C ambient.
 Marking Type, inductance and current.

Inductance uH (±20%)	Idc max.	Rdc Typ.	Fr Typ.	Dimensions D × L
	A	milliOhms	MHz	
5.6	8	17	83	8 × 26
10	5	35	65	7.5 × 26
15	4	50	55	7.3 × 26
33	3.5	70	7	11 × 26
68	3	100	5	11 × 26
100	2.5	150	3.5	10 × 26
150	1.8	300	2.5	9.8 × 26
330	1.4	500	2	11 × 26
680	1	1000	1.1	10 × 26
1000	0.8	1500	0.85	9.8 × 26
1500	0.7	2000	0.79	10.3 × 26
3300	0.5	4000	0.46	10.6 × 26
6800	0.35	8000	0.36	10.8 × 26
10000	0.3	12000	0.25	9.8 × 26

Imax: Maximum current at 40 °C ambient.
 For other temperatures use the "Load Ratings" curve 3 shown on page 17.

To order these chokes please specify type 1586, the inductance value and the current rating.
 e.g. "1586 10µH 5A".

Dimension are in mm and are nominal values.

FERROPERM