


PI-filter for EX applications according to EN 50 020

17 SA 37

Corresponding to F.C. type SPPL4715

EMC Filters' Pt.No. 33825001S

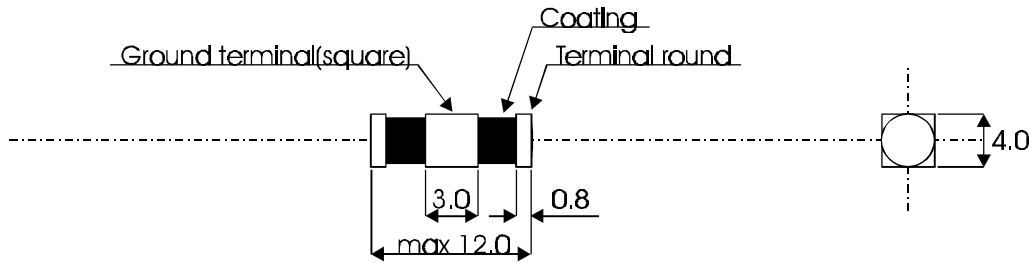

Working voltage.....	250Vdc
Test voltage.....	1500Vdc 1min. / 1060Vac 1min.
Feed through current.....	max 10A
Insulation resistance.....	min 10 ⁴ MΩ
IEC category.....	55/085/56
Capacitance.....	4nF -0/+100%
Inductance.....	1000nH -50/+100%
Soldering Conditions.....	250°C
Marking.....	none

Attenuation (typical values)	1MHz	2dB
	10MHz	25dB
	100MHz	65dB
	1000MHz	80dB

FERROPERM