


Description:

MAGNELAB

Magnelab UCT-0300 Series are better than one percent accuracy and less than one degree phase angle. Output is controlled by a precision resistor fixed at the industry standard of 0.333 Volt AC. The rugged epoxy encapsulated construction comes with eight feet twisted leads. Custom outputs and other parameters are available at customer request.


Features:

- Rated input up to 30 Amp
- Output 0.333 Volt AC at rated current
- Linearity accuracy ± 1%
- Accuracy at 10% to 130% of rated current




- Phase angle < 1 degrees measured at 50% rated current
- Operates from 30 Hz to 1,000 Hz
- 8 ft. twisted-pair lead
- UL recognized, CE, and RoHS compliant

DIMENSION	INCH	MM	
А	0.300	7.62	
В	1.700	43.18	
С	0.750	19.05	

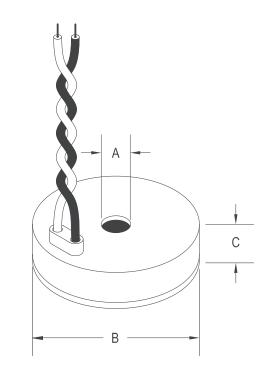



UCT-0300-000	No Burden Resistor
UCT-0300-005	5 Amp
UCT-0300-010	10 Amp
UCT-0300-015	15 Amp
UCT-0300-020	20 Amp
UCT-0300-030	30 Amp



(E RoHS 🔊 ISO 9100:2000