


TYPE 1580 and 1580K

RADIO-FREQUENCY CHOKES

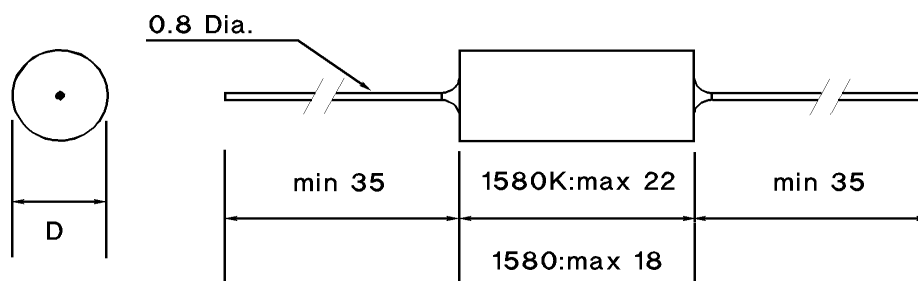

Dimensions in mm.

Core Low-loss
 Iron Powder
 Coating 1580 None
 1580K Insulated with heat-shrink tube
 Load on Terminals 2Kg max
 Working Temperature -55 to +85°C ambient
 Marking 1580 None
 1580K Type and inductance

Inductance mH (±10%)	Rdc Ω Typ	Maximum Idc A		Fr MHz Typ	Maximum D mm	
		1580	1580K		1580	1580K
1.0	11	0.22	0.16	3.3	8.5	10.0
2.5	19	0.16	0.12	2.0	10.0	11.5
5.0	32	0.12	0.09	1.4	11.0	12.5
10.0	47	0.12	0.09	1.0	14.0	16.0

Idc max: Maximum Current at 85°C ambient
 For other temperatures use the "Load Ratings" curves on page 17
 Curve 1 for 1580K and Curve 2 for 1580

To order these chokes please specify the type number and the inductance value.

FERROPERM