

RopeCT<sup>®</sup> AC Current Sensor RCT-350T-Coil 3.50 Inch Inside Diameter Rogowski Coil


## Description:

Magnelab RCT-XXXT-Coil Series flexible RopeCT° current sensor measures AC current up to 15,000 Amps. The coil opens at the connector junction and can be installed on an existing cable or buss-bar in a matter of seconds.

This "Tear-drop" style design facilitates installations with limited electrical panel space. Electrical performance is equal to our standard RCT-1800-XXX Series.

## Features:

- Input from 250 Amp to 15,000 Amp
- Output 0.070 Volt per 1,000 Amp
- Linearity Accuracy 1%
- Maximum useable Voltage: 600 V (on bare conductor)
- Custom diameters, output, and other parameters are available
- 8 ft. 600 Volt, 24 AWG gray cableUL Recognized

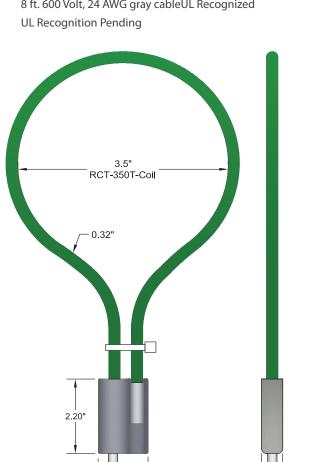



 $\epsilon$ 

0.60"



## Five sizes available: RCT-100T (1.0" Diameter) RCT-150T (1.5" Diameter) RCT-350T (3.5" Diameter) RCT-600T (6.0" Diameter) RCT-900T (9.0" Diameter)

